


UNEK6213GK



ENGINEERING CODE
654IA8212AA

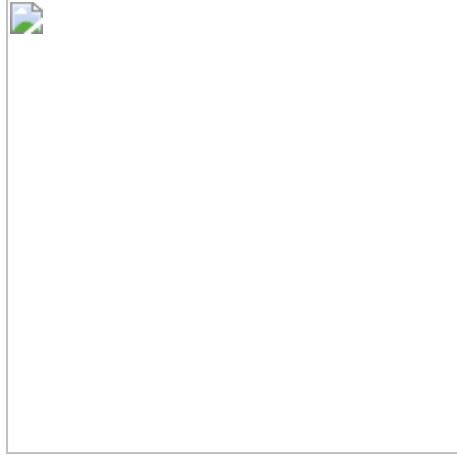

REFRIGERANT
R-449A



POWER SUPPLY
220-240 V 50 Hz



APPLICATION
HBP



MOTOR TYPE
CSIR



STANDARD
EN13215_RG20

CE

ECODESIGN
COMPLIANT



COOLING CAPACITY
880 W



EFFICIENCY
1.43 W/W

DATA

GENERAL DATA

Model UNEK6213GK

ELECTRICAL DATA

Locked Rotor Amperage (LRA) 21.00 A

Rated Load Amperage (RLA) 5.97 A

Maximum Overcurrent Protection (MOP) 13.43 A

Minimum Current Ampacity (MCA) 7.5 A

ACCESSORIES

Discharge valve FLARE 1/4" 2110085

Suction valve FLARE 3/8" 2110059

CONDENSING COMPONENTS

Compressor NEK6213GK M/HBP

Condenser 3R11T 2451206

Refrigerant R-404A

Expansion Device C-V

Fan Blade Diameter 254 mm

Fankit 16W 254/28/5B 1996579

MECHANICAL DATA

Air Flow	595 m ³ /h
Height	296 mm
Receiver	1.1 L
Shaft Power	16 W
Weight	23 Kg
Width	340 mm
Length	465 mm

PERFORMANCE

TESTED CONDITIONS

Tested Refrigerant	R-449A
Tested Application	HBP
Tested Standard	EN13215_RG20

RATED POINTS

Ambient Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Consumo de Potencia W
32	-10	880	1.43	614

Test Condition: Subcooling 3 K, Return Gas 20 °C.

PERFORMANCE CURVE

Ambient Temperature 25°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Consumo de Potencia W
-15	785	1.45	540
-5	1136	1.72	660
0	1329	1.82	731

Test Condition: Subcooling 3 K, Return Gas 20 °C.

PERFORMANCE CURVE

Ambient Temperature 32°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Consumo de Potencia W
-15	721	1.30	555
-5	1047	1.54	681
0	1225	1.62	757

Test Condition: Subcooling 3 K, Return Gas 20 °C.


PERFORMANCE CURVE

Ambient Temperature 43°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Consumo de Potencia W
-15	591	1.00	593
-5	857	1.15	743
0	999	1.20	834

Test Condition: Subcooling 3 K, Return Gas 20 °C.

ENVELOPE

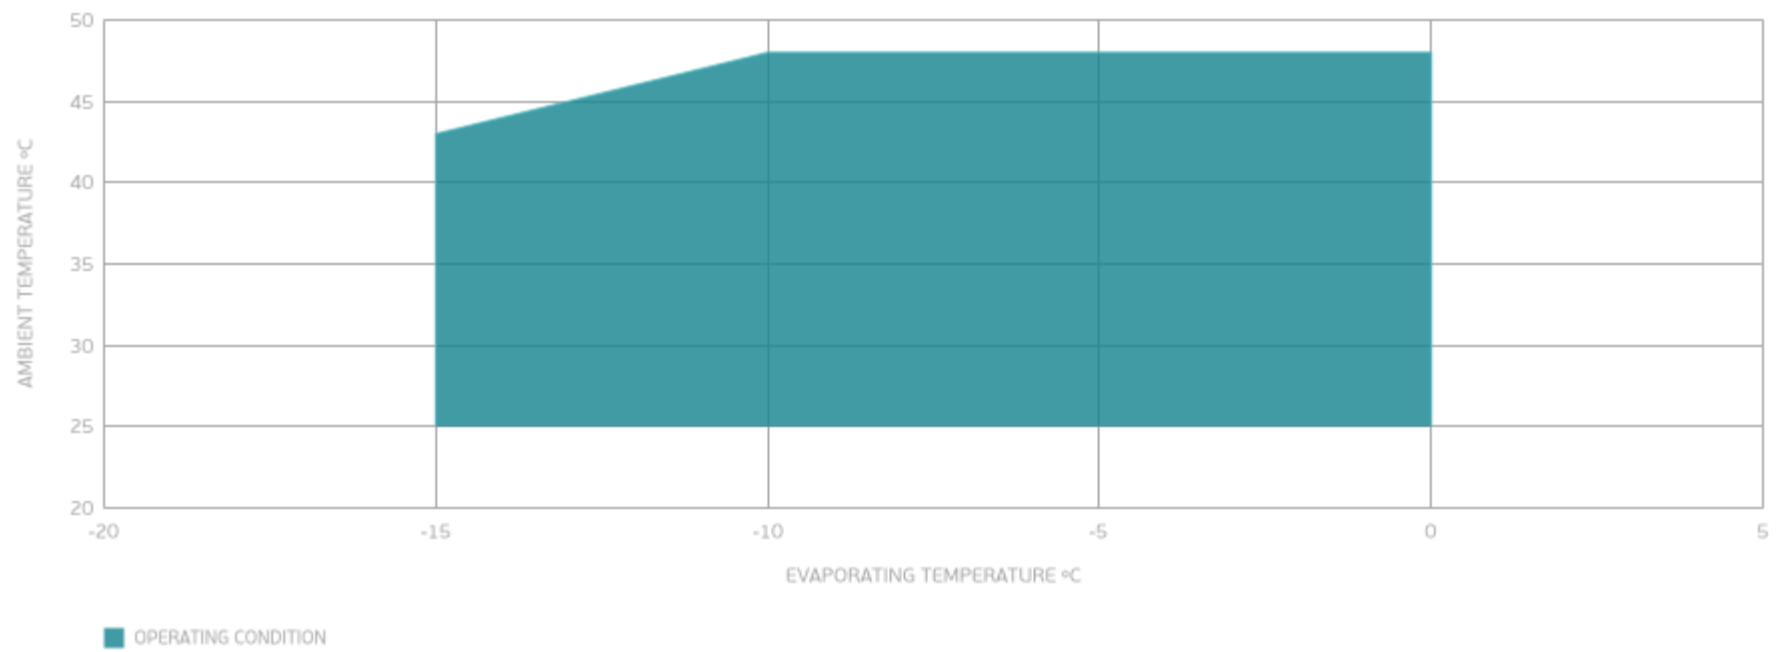

EXTERNAL DIMENSIONS

