



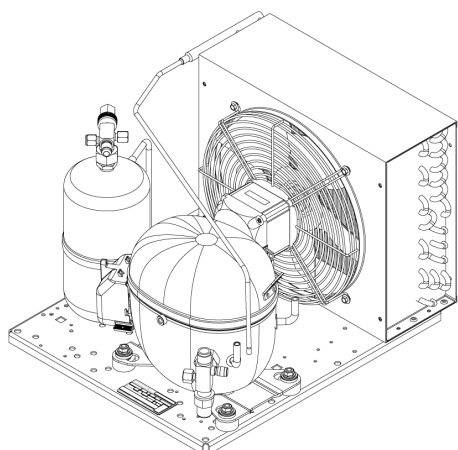


GENERAL DATA

Application:	M/HBP
Refrigerant:	R134a
Expansion Device:	C-V
Weight:	30.1 kg
Receiver:	2.3 liter
Voltage/Frequency:	220 - 240 V 50 ~
Height:	30.1 mm
Length:	494 mm
Width:	395 mm
Institute Approvals:	CE


EXTERNAL DIMENSIONS

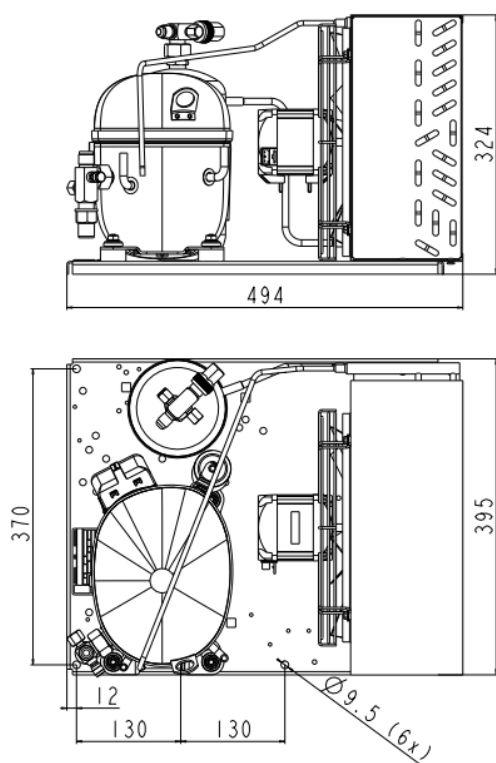

WIRING DIAGRAM

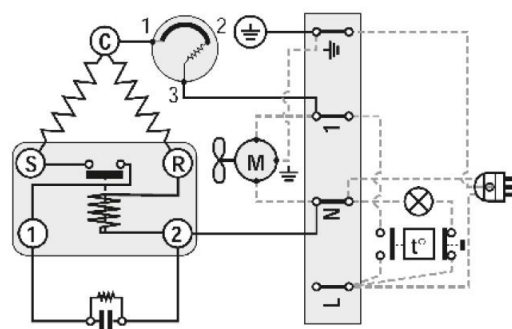

OPERATING ENVELOPE

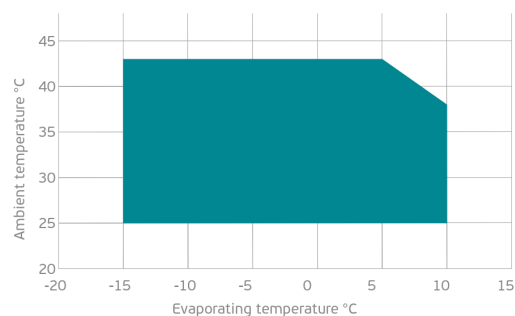

COMPONENTS (SPARE PARTS)

condenser:	3R12T	2451218
valve_suca:	FLARE 1/2"	2110057
compressor:	NT6217Z	212BA09..AC

For additional accessories please contact our technical support

valve_disch:	FLARE 3/8"	2110056
fankit:	34W 275/31°/5B	1996588
elkit:	ELKOM NT6217Z	212BA0412A

ELECTRICAL DATA

Motor Type:	CSIR -
Locked Rotor Amperage (RLA):	25 A
Max.Current:	5.43 A

At maximum evaporating temperature and maximum ambient temperature.

FAN MOTOR

Number:	1 -
Shaft Power:	34 W
Air Flow:	640 m ³ /hod
Blade Diameter:	275 mm

PERFORMANCE CURVE DATA

Standard: EN13215_RG20 / return gas 20°C, subcooling 3K

						50 Hz
		Evaporating Temperature (°C)	Cooling Capacity (W)	Power Consumption (W)	Current Consumption (A)	Efficiency (W)
25°C Ambient Temperature		10°C	2 254	897	5.40	2.51
		5°C	1 888	806	5.07	2.34
		0°C	1 567	728	4.80	2.15
		-5°C	1 288	660	4.58	1.95
	Rated point	-10°C	1 050	599	4.40	1.75
		-15°C	850	541	4.24	1.57
32°C Ambient Temperature		10°C	2 049	923	5.57	2.22
		5°C	1 716	832	5.23	2.06
		0°C	1 424	753	4.95	1.89
		-5°C	1 170	683	4.73	1.71
	Rated point	-10°C	954	618	4.54	1.54
		-15°C	773	556	4.37	1.39
43°C Ambient Temperature		5°C	1 511	890	5.42	1.70
		0°C	1 242	805	5.11	1.54
		-5°C	1 007	727	4.84	1.38
	Rated point	-10°C	803	654	4.61	1.23
		-15°C	628	581	4.40	1.08

