


NT6217U



ENGINEERING CODE
842FA04

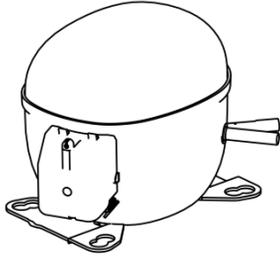

REFRIGERANT
R-290



POWER SUPPLY
220-240 V 50 Hz



APPLICATION
MBP



MOTOR TYPE
CSIR



STANDARD
EN12900



COOLING CAPACITY
948 W



EFFICIENCY
1.85 W/W



DATA

GENERAL DATA

Model	NT6217U
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	MBP
Expansion Device	Capillary Tube or Expansion Valve
Compressor Cooling	Fan/220
HP	1/2+
Starting Torque	HST
Plant	SLOVAKIA

ELECTRICAL DATA

Start Winding Resistance	12.7 Ω at 25°C
Run Winding Resistance	2.7 Ω at 25°C
Locked Rotor Amperage (LRA) 50Hz	25 A

MECHANICAL DATA

Displacement	14.5 cm ³
Oil Charge	450 ml
Oil Type	AB
Oil Viscosity	ISO32
Weight	16.9 Kg

ELECTRICAL COMPONENTS

Start Capacitor	53-64 µf/330 V
CSR CSIR BOX	No
Starting Device Type	RELAY
Starting Device Description	MTRPH-54-65*
Overload Protection	T0645/G6

PERFORMANCE

TESTED CONDITIONS

Tested Refrigerant	R-290
Tested Application	MBP
Tested Standard	EN12900
Tested Cooling	Fan
Tested Voltage	220 V
Max Refrigerant Charge	400 g
Refrigerant Temperature	Dew

RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
45	-10	948	1.85	513	-	11.66

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

PERFORMANCE CURVE

Condensing Temperature 35°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-20	739	1.83	403	-	8.19
-15	929	2.14	433	-	10.36
-10	1150	2.48	464	-	12.88
-5	1406	2.87	490	-	15.83
0	1698	3.34	508	-	19.27
5	2032	3.96	513	-	23.26
10	2409	4.80	502	-	27.87

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

PERFORMANCE CURVE

Condensing Temperature 45°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-20	596	1.37	436	-	7.25
-15	757	1.60	472	-	9.26
-10	948	1.85	513	-	11.66
-5	1173	2.12	554	-	14.53
0	1434	2.43	590	-	17.92
5	1735	2.81	616	-	21.89
10	2078	3.30	630	-	26.52

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.


PERFORMANCE CURVE

Condensing Temperature 55°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-10	769	1.45	532	-	10.57
-5	959	1.64	583	-	13.28
0	1184	1.87	633	-	16.55
5	1448	2.13	679	-	20.45
10	1753	2.45	714	-	25.03

Test Condition: Subcooling 0 K, Return Gas 20 °C. Data are an indication of performance based simulation.

ENVELOPE

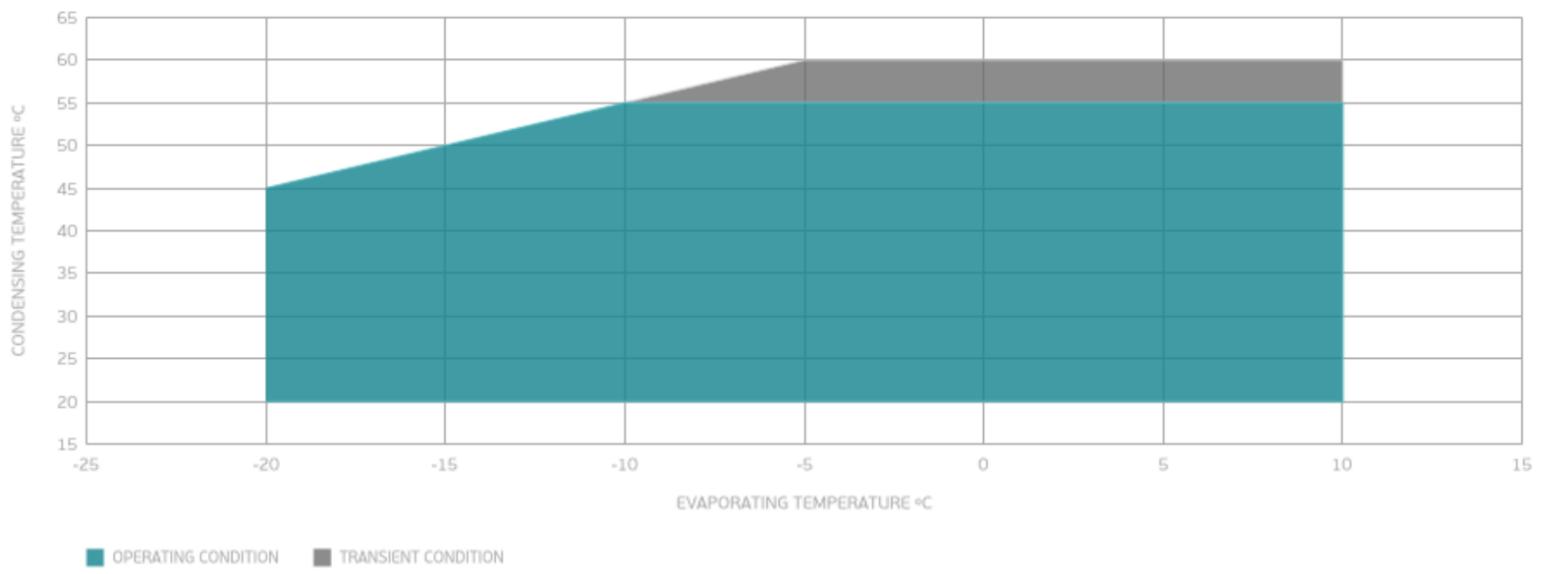

External

EXTERNAL CHARACTERISTICS

Base Plate UNI

Tray Holder NO

Connector	Internal Diameter	Shape	Material
Suction	9.6 mm	VERTICAL	COPPER
Discharge	6.42 mm	VERTICAL	COPPER
Process	6.42 mm	VERTICAL	COPPER

EXTERNAL DIMENSIONS

